

WiseCable™ Stainless Steel Cable Rail



Push lock



The push lock is a concealed, swageless, non-tensioning, through-the-post-mounted fitting that is suitable for use on level runs only, and is available for 1/8" diameter 1x19 stainless steel cable.

The push lock must be used with a tensioning fitting on the opposite end of the run. This fitting is installed into a pre-drilled hole in the end post. Using the push lock fitting on level runs requires that a minimum of 1-1/2" of clearance exists on the back side of the end post (to install the fitting through the back side of the post). It is also recommended that a stainless steel flat washer be installed between the shoulder of the fitting and the mating surface of the wood post. The cable attaches to the fitting via our push lock locking wedge system which requires no special tools.

This fitting is made to look similar to the invisible receiver from the exterior of the post, so it is recommended to use a receiver with stud on the opposite end whenever practical to maintain a consistent look.

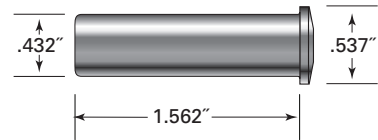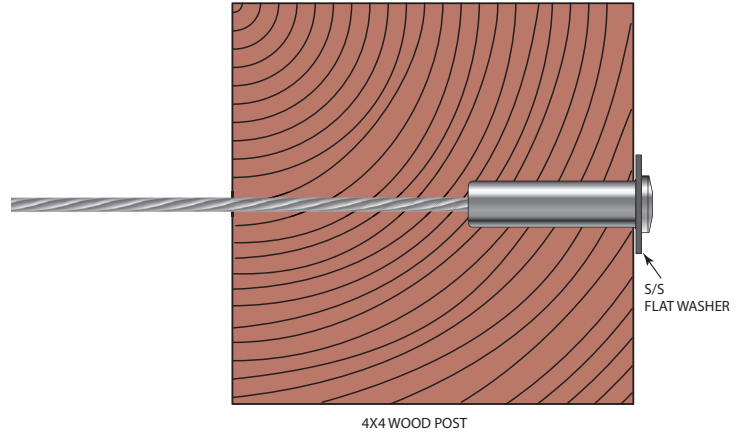

CABLE DIA.	PART NO.
1/8"	Push Lock